



GISTM Principle 15 – August 2026 Public Disclosure

Kibali Gold Mine
CTSF1&2

5 August 2026

FACILITY LEVEL STATEMENT OF CONFORMANCE¹

The Kibali CTSF 1&2 Tailings Storage Facility is in Full Conformance with the GISTM.

PRINCIPLE 15

Publicly disclose and provide access to information about the tailings facility to support public accountability.

REQUIREMENT 15.1

A. For new tailings facilities for which the regulatory authorisation process has commenced, or that are otherwise approved by the Operator, the Operator shall publish and update, in accordance with Principle 21 of the UNGP, the following information:

Requirement 15.1 A is not applicable as this is an existing facility.

B. For each existing tailings facility and in accordance with Principle 21 of the UNGP, the Operator shall publish and update at least on an annual basis, the following information:

1. A description of the tailings facility (information may be obtained from the output of Requirements 5.5 and 6.4)

The Kibali Cyanide Tailings Storage Facility 1&2 (CTSF1&2) is in the Haut – Uele province of the Democratic Republic of Congo, 13km Northeast of Watsa. The CTSF1&2 is lined with High Density Polyethylene (HDPE), and is a downstream raised, compacted earth fill and waste rock buttressed facility. Kibali Gold Mines SA (Kibali) is a joint venture company owned in equal proportions of 45%, by Barrick Mining Corporation (Barrick) and AngloGold Ashanti and 10% by Société Minière de Kilo-Moto (SOKIMO) but operated by Barrick. Barrick currently contracts Paragon Tailings to assist it with the daily operational activities associated with the TSF.

CTSF1 was commissioned in September 2013. To sustain tailings deposition, CTSF2 was constructed in February 2016. In October 2018, CTSF1 and CTSF2 were merged into a single facility, designated CTSF1&2, and raised to an elevation of 895.5 mamsl. A second raise was completed in April 2022, increasing the facility elevation to 899.0 mamsl. The CTSF1&2 has reached the end of its planned depositional life at end of July 2025 and is in the closure transition phase. CTSF1&2 holds a total amount of 31.91 million tons of tailings with a maximum embankment height of 45.0m (899 mamsl).

¹ **Facility-Level Conformance Definitions:**

- **Full Conformance:** All applicable requirements are met in full; or, all applicable requirements are met but the facility requires remedial works to conform to specific requirements (e.g. 4.7 or 5.7), for which basic engineering is complete, budgeted, and a construction schedule has been developed and approved by the Accountable Executive to complete remedial works as soon as reasonably practicable.
- **Partial Conformance:** Some requirements are fully met, others are partially met or not met.
- **Non-Conformance:** No applicable requirements are either partially or fully met.

2. The Consequence Classification (Requirement 4.1)***Facility Consequence Classification***

Current Classification	Classification used for Design
Very High (GISTM 2020)	Extreme (GISTM 2020)

3. A summary of risk assessment findings relevant to the tailings facility (Information may be obtained from the output of Requirement 10.1)

The Kibali CTSF1&2 Risk Assessment was completed in October 2023 and no unmitigated risks were identified. The assessment confirmed that the measures implemented for the facility ensure the risk level is as low as reasonably practicable (ALARP).

4. A summary of impact assessments and of human exposure and vulnerability to tailings facility credible flow failure scenarios (Information may be obtained from the output of Requirements 2.4 and 3.3)***Summary of Potentially Material Impacts***

Aspect	Impact Description	Mitigation Measure
Biodiversity loss	In case of dam wall failure from CTSF1&2, the aquatic ecosystem within the Kibali river and surrounding forest will be flooded and will impact the diversity of species downstream. This will include the loss of native species whilst also resulting in degradation of biodiversity and possible wildlife mortality due to possible exposure to Cyanide.	In the event of a dam safety emergency, the Emergency Preparedness and Response Plan will be initiated. This will address the immediate needs of communities and environment. Further, this will be supported by developing and implementing a recovery and rehabilitation plan based on the impact extent and severity.
Land & soil	Soil quality degradation with potential increase in metals along the inundation stream. Tailings sediments build up in the inundation stream.	
Water contamination	Reduced water availability for community consumption due to contamination of available surface water and poor sanitation as communities use community wells and available surface water in the Kibali River and localised tributaries. Contamination of the Kibali River, which is a significant source of water and aquatic ecoservices to the community e.g. source of water for livestock and fishing.	
Community	Two villages southeast of the TSFs, namely Renzi and Kota Malembe, will be affected by the potential breach inundations.	

Aspect	Impact Description	Mitigation Measure
Cultural heritage	One cemetery located in Renzi is likely to be impacted. No known archaeological sites fall within the inundation zone.	
Socio-Economic	Loss of economic activities in some of the nearby villages is expected in the event of a potential breach due to inaccessibility to land used for agricultural activities including agricultural fields, livestock and fish farming.	
Human health	Communities affected by a credible flow scenario included those located south-east of the TSF, namely Renzi and Kota Malembe. The high flood flows would create the risk of various health impacts, limit access to potable water and potential drownings. Should the western wall fail, then employees and contractors would equally be considered at risk, specifically those working west of the plant and near pits that are likely to fill and overtop to the Catchment Dam.	
Community Infrastructure	During an emergency dam failure, the likely impact on basic community infrastructure includes churches, schools, markets, health centre, stadium and bridges, which connect villages with daily supply of goods and services.	

5. A description of the design for all phases of the tailings facility lifecycle including the current and final height (Information may be obtained from the output of Requirement 5.5)

The CTSF1&2 is a HDPE lined downstream raised, compacted earth fill and waste rock buttressed, closed spigotted ring dyke facility. The CTSF1&2 shares a common compacted residual soil embankment with the adjacent Float Tailings Storage Facility (FTSF). The CTSF1&2 initially comprised two adjacent facilities separated by a ridge. These two facilities are now combined into one single facility, engulfing the ridge between them as they increased in height over time. The external embankments are 1 vertical to 3 horizontal and design freeboard minimum is 1.5m.

The CTSF1&2 overlies the geological formation of the Moto greenstone belt, which contains Archean Kibalian volcano sedimentary rocks and ironstone-chert horizons. The volcano-sedimentary sequence comprises sedimentary rocks, a variety of pyroclastic rocks, basaltic flow rocks, mafic-intermediate intrusions and intermediate-felsic intrusive rocks. The subsurface soils are residual in nature and decrease in weatherability while increasing in stiffness with depth. Ground water is encountered across the site at near surface & 3.0m below natural ground level.

The CTSF1&2 has had a Design Engineer who is the Engineer of Record (EOR) involved throughout its development.

The CTSF1&2 stage developments are summarised in the table below.

Stage	Status	Material	End Elevation (mamsl)
CTSF 1 Phase 1	Completed	Earth fill	891.5
CTSF 2 Phase 1	Completed	Earth fill	892
CTSF 1 st lift	Completed	Earth fill	895.5
CTSF 2 nd lift	Completed	Waste Rock	899

Water on the CTSF1&2 is decanted to a Return Water Dam by a pump mounted skid system with a suction pipe located at the supernatant pool. The CTSF1&2 is designed to contain the Probable Maximum Precipitation (PMP) event with sufficient freeboard and decanting of the PMP within 32 days. CTSF1&2 has a spillway constructed at North – West of the facility.

Tailings deposition in CTSF1&2 ceased in July 2025. The facility has since entered a closure transition phase, during which rainfall runoff and accumulated water are being managed to ensure compliance with freeboard requirements under DRC regulations. Conceptual closure studies have been completed, and detailed closure studies are currently underway.

6. A summary of material² findings of annual performance reviews and dam safety review (DSR), including implementation of mitigation measures to reduce risk to ALARP (Information may be obtained from output of Requirements 10.4 and 10.5)

Summary of Material Findings and Mitigation Measures

Reference	Material Findings Summary	Mitigation Measures to Meet ALARP
2026 Q1 DSI	No material findings	None
2024 DSR	No material findings	None

² Material findings are findings that have a high probability of becoming or actual dam safety issues that require immediate attention and are considered immediately dangerous to life, health or the environment, a significant regulatory enforcement.

7. A summary of material³ findings of the environmental and social monitoring programme including implementation of mitigation measures (Requirement 7.5)

There was no material environmental nor social findings from monitoring programs in the relevant reporting period.

8. A summary version of the tailings facility EPRP for facilities that have a credible failure mode(s) that could lead to a flow failure event that:

- informed by credible flow failure scenarios from the tailings facility breach analysis;
- includes emergency response measures that apply to project affected people as identified through the tailings facility breach analysis and involve cooperation with public sector agencies; and
- excludes details of emergency preparedness measures that apply to the Operator's assets, or confidential information (Requirements 13.1 and 13.2);

Purpose and Scope: The Emergency Preparedness and Response Plan (EPRP) provides a predetermined plan of action to be implemented in close coordination with emergency responders in the unlikely case of a dam safety emergency. It defines the roles and responsibilities of all entities involved, prioritizing the saving of lives, reducing damage to property, and minimizing impacts to the environment. The EPRP contains procedures and information to assist in assessing the situation, provide early warnings and identify maps of critical areas in the event of an emergency.

Site data and effects of inundation: A dam breach analysis and inundation study was conducted for Kibali Gold Mine Limited to evaluate the potential downstream impact of hypothetical breaches of the TD at Kibali Gold Mine. A summary of the human exposure and vulnerability to tailings facility credible flow failure scenarios is provided in Section 4.

Roles and Responsibilities: Kibali Gold Mine has identified the following key roles and responsibilities for emergency planning and response to a dam safety emergency.

Responsible person – The person appointed as the General Manager of Kibali Gold Mine will provide notifications, designate the Incident Command Team (ICT), and establish Emergency Operation Center (EOC) in coordination with Government and Provincial resources.

Incident command team – The team who are responsible for management of the response. They will initiate warnings and order evacuation of people within the evacuation area. Furthermore, they will notify local agencies to evacuate people and close roads. The ICT will coordinate broader response activities until the EOC is setup and able to take over.

³ An incident is considered material if it:

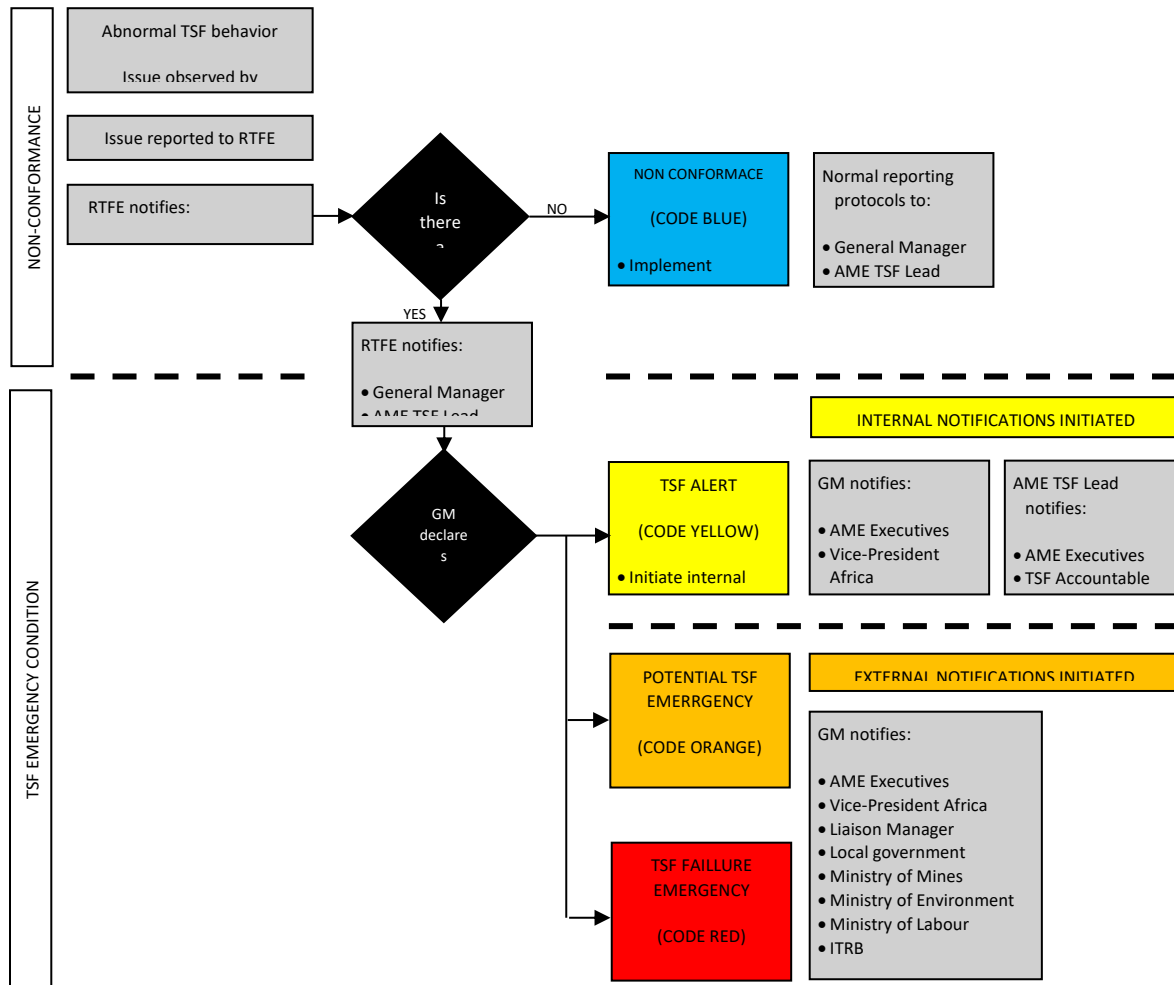
a) Causes significant negative impact on human health or the environment;
 b) Extends onto publicly accessible land and has the potential to cause significant adverse impact to surrounding communities, livestock or wildlife;
 c) Results in a breach of license conditions, the convention between the mine and government, or a violation of environmental regulations and standards or constitute releases above Reportable Quantities (RQs) any of which is immediately reportable to the government by law or other statute; or
 d) Results in a release of cyanide (above 0.5 mg/l of WAD cyanide, confirmed by a certified third-party laboratory as above detection limit) to any surface water that leaves the site boundaries or any groundwater aquifer (whether on or off-site).

Emergency operations centre - Provide comprehensive support for the ICT including coordination of site activities, security, and logistical requirements. The EOC is responsible for ongoing communication with stakeholders and media, technical and administrative support.

TSF operations manager - The person appointed for day-to-day operational activities of the TSF who is familiar with the infrastructure and can mobilize resources of machinery and personnel to perform mitigating controls in the case of a dam safety emergency.

Emergency response, processes and procedures: Potential emergency situations involving the Kibali TSF are classified according to:

- Kibali Gold Mine has a clearly defined and measurable emergency trigger points that define the transition from a normal operational condition to one that entails an immediate risk of dam failure.
- Besides emergency trigger points there are clear indications to undertake an urgent and targeted inspection. If this inspection identifies an emergency trigger point, the EPRP is activated.
- Potential emergency situations involving the Kibali TSF are classified as follows:
 - **Code Yellow** – Conditions do not present an immediate emergency but do require prompt investigation.
 - **Code Orange** – Conditions may present an emergency situation if not resolved but is not imminent.
 - **Code Red** – Condition is an active or imminent emergency defined by the failure of a significant component of the TSF.

Kibali TSF EPRP Notification Flowchart


Further to the emergency planning Kibali Gold Mine remains in constant engagement with local agencies, first responders and potentially affected community members with regards to TD major emergency scenarios.

9. Dates of most recent and next independent reviews (Requirement 10.5)
Dates of Independent Reviews

	Next Review	Latest Review	Previous Review
IGRB Review ⁴	December 2026	January 2025	February 2024
DSR	April 2029	April 2024	N/A

⁴ IGRB: Independent Geotechnical Review Board

10. Annual confirmation that the Operator has adequate financial capacity (including insurance to the extent commercially reasonable) to cover estimated costs of planned closure, early closure, reclamation, and post-closure of the tailings facility and its appurtenant structures (Requirement 10.7)

Barrick has sufficient financial resources to meet its business requirements for the foreseeable future, including capital expenditures, working capital requirements, interest payments, environmental rehabilitation, securities buyback and dividends.

For additional information refer to Barrick Annual Report 'Financial Position and Liquidity' (page 50) and 'Contractual Obligations and Commitments' table (page 53).

[Barrick Annual Report](#)

C. Provide local authorities and emergency services with sufficient information derived from the breach analysis to enable effective disaster management planning (Information may be obtained from the output of Requirement 2.3)

List of Documents Shared with Local Authorities and Emergency Services

Local Authorities or Emergency Services	Document
Territorial Administrator (TA)	EPRP
Assistant Territorial Administrator (ATA)	EPRP
Sector Chief (Surur)	EPRP
Local Medical Team	EPRP
Local Red Cross Team	EPRP
Local Environmental services	EPRP
Division chief of Education	EPRP
Groupment Chief	EPRP
Local Development committee	EPRP
Media	EPRP
Civil Society	EPRP

REQUIREMENT 15.2

Respond in a systematic and timely manner to requests from interested and affected *stakeholders* for additional information *material* to the public safety and integrity of a *tailings facility*. When the request for information is denied, provide an explanation to the requesting *stakeholder*.

Barrick is committed to the timely response to requests for additional information material to the public safety and integrity of their TSFs from interested and affected stakeholders. In the event that specific information cannot be shared with the requesting stakeholder, an explanation will be provided. Information on Barrick's Tailings Management policy and our Social Performance Policy can be found at the following links:

[Tailings Management Policy](#)

[Social Performance Policy](#)

REQUIREMENT 15.3

Commit to cooperate in credible global transparency initiatives to create standardised, independent, industry-wide and publicly accessible databases, inventories or other information repositories about the safety and integrity of *tailings facilities*.

Barrick is committed to global transparency around the public safety and integrity of our TSFs. A link to Barrick's Tailings Management Policy can be found here.

[Tailings Management Policy](#)

CAUTIONARY STATEMENT ON FORWARD-LOOKING INFORMATION [KIBALI CTSF1&2]

Certain information contained in Barrick's Global Industry Standard on Tailings Management ("GISTM") tailings disclosure ("GISTM Disclosure"), including any information as to the design and operation of Barrick's tailings facilities and Barrick's sustainability strategy and vision, projects, plans or future technical, or operating performance constitutes "forward-looking statements". All statements, other than statements of historical fact, are forward-looking statements. The words "target", "plan", "project", "develop", "initiate", "estimate", "potential", "may", "will", "likely", "unlikely", "can", "could", "would" and similar expressions identify forward-looking statements. In particular, this GISTM Disclosure contains forward-looking statements including, without limitation, with respect to: the results of Barrick's annual performance and dam safety reviews and related mitigation measures for Kibali's Cyanide Tailings Storage Facility 1&2 ("CTSF1&2"), the design, storage capacity and lifecycle of the CTSF1&2; the potential environmental and social impacts of the CTSF1&2 and related monitoring and risk assessments; the results of Barrick's tailings facility breach analysis and inundation studies including human exposure and vulnerability to flow failure scenarios, disaster management planning and emergency preparedness; and estimated costs associated with the CTSF1&2.

Forward-looking statements are necessarily based upon a number of estimates and assumptions that, while considered reasonable by the company as at the date of this Response in light of management's experience and perception of current conditions and expected developments, are inherently subject to significant business, economic and competitive uncertainties and contingencies. Known and unknown factors could cause actual results to differ materially from those projected in the forward-looking statements and undue reliance should not be placed on such statements and information. Such factors include, but are not limited to: operating or technical difficulties in connection with mining or development activities, including geotechnical challenges, tailings dam and storage facilities failures; physical and transition risks related to climate change, including extreme weather events and resource shortages; risk of loss due to acts of war, terrorism, sabotage and civil disturbances; changes in national and local government legislation, taxation, controls or regulations and/or changes in the administration of laws, policies and practice; expropriation or nationalization of property and political or economic development in the Democratic Republic of the Congo or other countries in which Barrick does or may carry on business in the future; timing of receipt of, or failure to comply with, necessary permits and approvals; our ability to maintain relationships with public sector agencies and the communities surrounding Kibali's CTSF1&2; contests over access to water, power and other required infrastructure; and disruptions in the maintenance or provision of required infrastructure and information technology systems. In addition, there are risks and hazards associated with the business of mineral exploration, development and mining, including environmental hazards, industrial accidents, unusual or unexpected formations, pressures, cave-ins and flooding. Many of these uncertainties and contingencies can affect our actual results and could cause actual results to differ materially from those expressed or implied in any forward-looking statements made by, or on behalf of, Barrick. Readers are cautioned that forward-looking statements are not guarantees of future performance.

All of the forward-looking statements made in this GISTM Disclosure are qualified by these cautionary statements. Specific reference is made to the most recent Form 40-F/Annual Information Form on file with the SEC and Canadian provincial securities regulatory authorities for a discussion of some of the factors underlying forward-looking statements and the risks that may affect Barrick's ability to achieve the expectations set forth in the forward-looking statements contained in this Response.

Barrick disclaims any intention or obligation to update or revise any forward-looking statements whether as a result of new information, future events or otherwise, except as required by applicable law.