

FORWARD LOOKING STATEMENT

Certain statements included herein, including those regarding production, costs, development schedules and other statements that express management's expectations or estimates of our future performance, constitute "forward-looking statements" within the meaning of the United States Private Securities Litigation Reform Act of 1995. The words "believe", "expect", "anticipate", "contemplate", "target", "plan", "intends", "continue", "budget", "estimate", "may", "will", "schedule", and similar expressions identify forward-looking statements. Forward-looking statements are necessarily based upon a number of estimates and assumptions that, while considered reasonable by management are inherently subject to significant business, economic and competitive uncertainties and contingencies. We caution you that such forward-looking statements involve known and unknown risks, uncertainties and other factors that may cause the actual financial results, performance or achievements of Barrick to be materially different from our estimated future results, performance or achievements expressed or implied by those forward-looking statements and our forward-looking statements are not guarantees of future performance. These risks, uncertainties and other factors include, but are not limited to: changes in the worldwide price of gold or certain other commodities (such as silver, copper, diesel fuel and electricity) and currencies; changes in interest rates or gold lease rates that could impact realized prices under our forward sales program; legislative, political or economic developments in the jurisdictions in which Barrick carries on business; operating or technical difficulties in connection with mining or development activities; the speculative nature of gold exploration and development, including the risks of diminishing quantities or grades of reserves; and the risks involved in the exploration, development and mining business. These factors are discussed in greater detail in Barrick's most recent Form 40-F/Annual Information on file with the U.S. Securities and Exchange Commission and Canadian provincial securities regulatory authorities.

Barrick expressly disclaims any intention or obligation to update or revise any forward-looking statements whether as a result of new information, events or otherwise.

NORTH AMERICAN REGION – FOCUS AREAS FOR VALUE CREATION

BARRICK'S STRATEGIC OBJECTIVES

1.0 FOCUS ON ENVIRONMENT, HEALTH & SAFETY

2.0 DELIVER RESULTS

3.0 STRENGTHEN OUR ORGANIZATION

4.0 GROW THE BUSINESS

Community

- McLaughlin Reserve Endowment
- Storey County School District
- The Nature Conservancy
- Mining Association of B.C. Education Fund









BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Human Resources

- Turnover not a significant issue at Barrick mines
- Remain competitive
- Maintain good work environment – be team players
- Exporter of talent to other regions and Toronto

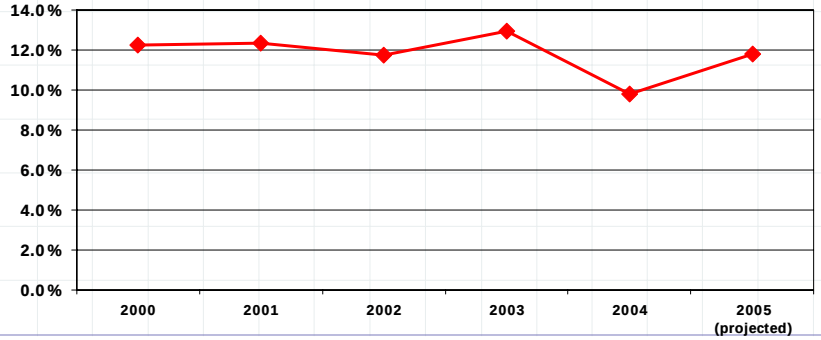

2005 Worldwide Gold Prices (% Change)

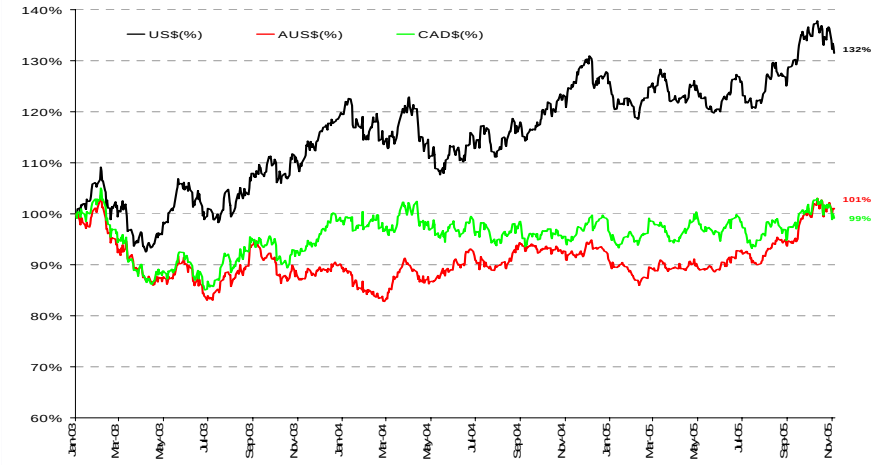

Cost Pressures

- Natural Gas

USA TODAY

Natural gas prices may leap 71%

- Iron ore increases 80%

China Business Strategy

Baosteel Accepts 71.5 Per Cent Iron Ore Price Increase

- Record Oil Prices & Propane Prices

USA TODAY | Marketplace

Higher and higher -- again: Gasoline prices set record

- Strong "Looney"

Bloomberg.com

Canadian Dollar Gains Most vs U.S. Dollar: Currency Scorecard

Sept. 20 (Bloomberg)

Barrick North America

- Consumes 1.2 billion KW of power
- Consumes 29 million gallons of diesel
- Consumes 27 million gallons of propane

Continually Improve

- "Every person going home safe. . ."
- Manage Commodity Consumption
- Energy Management
- Continuous Improvement
- Manage Labor

Barrick's Vision:

" To be the world's best gold company by finding, developing and producing quality reserves in a profitable and socially responsible manner"

Western 102 Project - Location



Western 102 Project Construction/Plant Details

- Contract to Wartsila for engineering, procurement and construction.
- 14 – 8.4 Megawatt gensets
- Net 115.6 MW Plant Total Output
- Natural gas fired reciprocating engines with closed loop water cooling systems

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Western 102 Project - Environmental

- Zero discharge design
- Closed loop – water glycol cooling system
- Very low water usage
  (+/- 200 gallons per day)
- Emission control – Selective Catalytic Reduction (SCR)
- Noise abatement – soundproofed and insulated

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Western 102 Project



Western 102 Project - Engine Hall B



Western 102 Project - SCR Emissions Control




Ruby Hill – East Archimedes Eureka, Nevada





Ruby Hill - East Archimedes

- Record of Decision received
- Pre-strip in 2005-2006
- Gold production starts in 2007
- 6-year mine life
- $75 million in construction capital, including $31 million in capitalized stripping costs

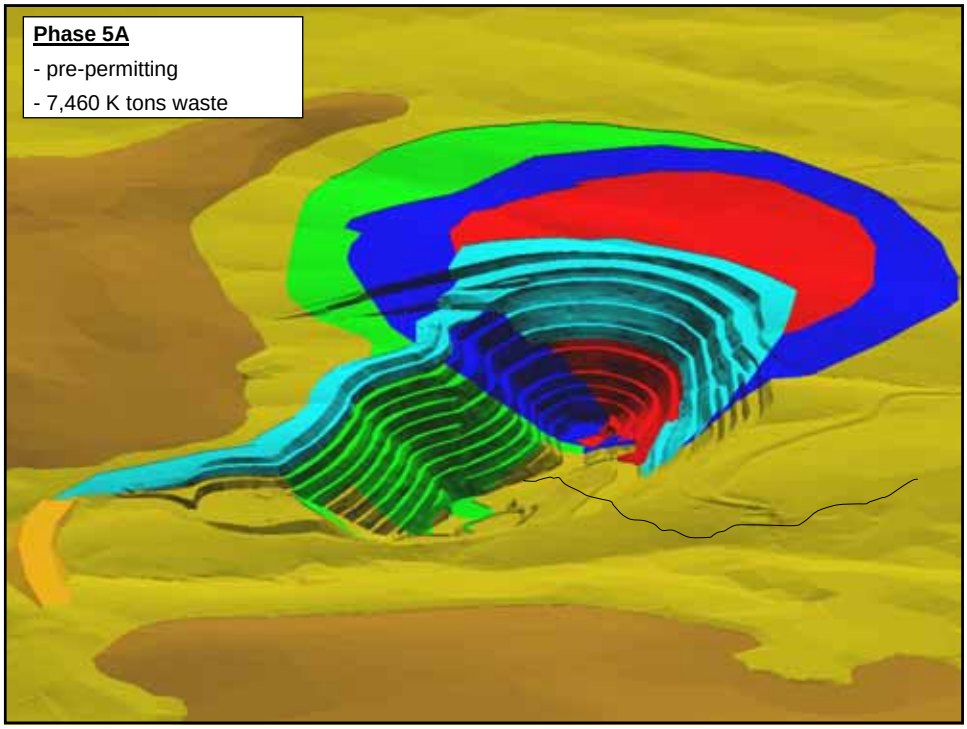
Phase 5A
- pre-permitting
- 7,460 K tons waste


Ruby Hill - Mining in July
CAT
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Round Mountain
Nevada

- Barrick ownership: 50%
- Operator: Kinross





Round Mountain – Pit Expansion Evaluation

- Significantly extends Life of Mine at low risk
- Positioned for higher gold prices
- Bridges production for exploration successes underground
- Defers closure cost




Round Mountain – U/G Exploration Project

- Plan: 6,400 feet of drift development
  39,500 feet of underground drilling
- Contract signed May 31 with J.S. Redpath
- First portal shot on July 5
- Portal and surface facilities under construction
- Drilling complete by mid-year 2006
- Potential production in 2008




BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005


Round Mountain – U/G Exploration Project

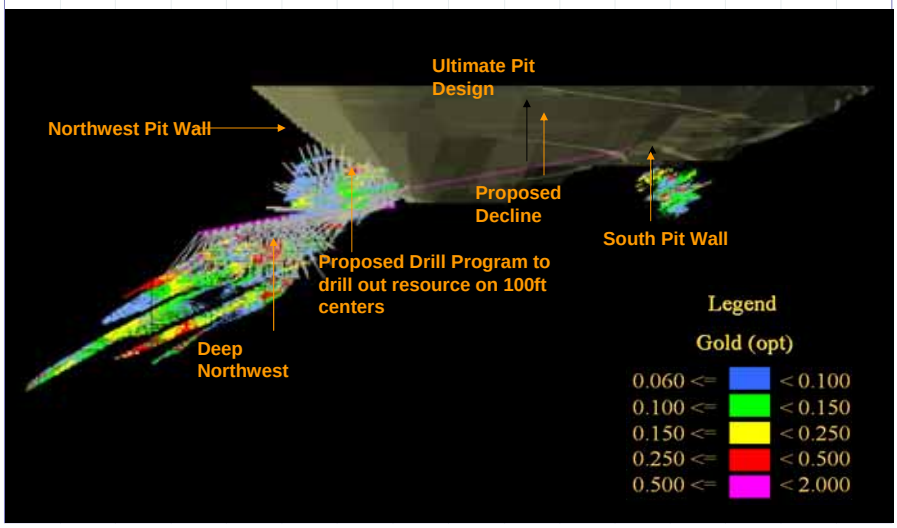


Exploration
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

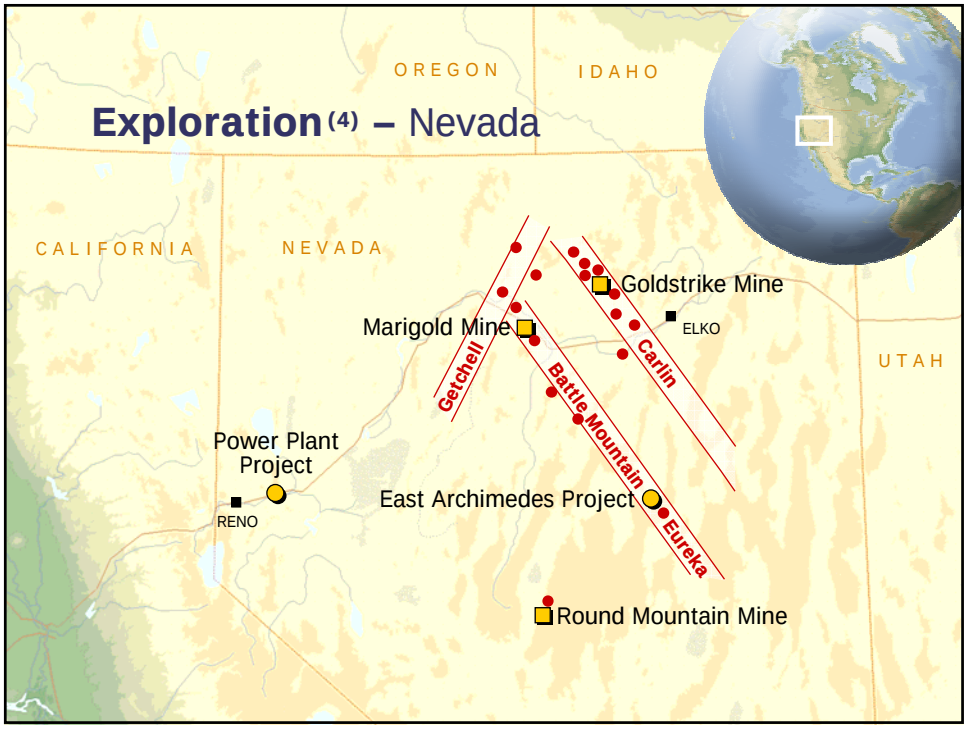

Exploration (4) – Nevada
OREGON
IDAHO
CALIFORNIA
NEVADA
UTAH
Goldstrike Mine
ELKO
Marigold Mine
Getchell
Carlin
Battle Mountain
Eureka
Power Plant Project
RENO
East Archimedes Project
Round Mountain Mine

Goldstrike and Carlin Trend 2005 Projects

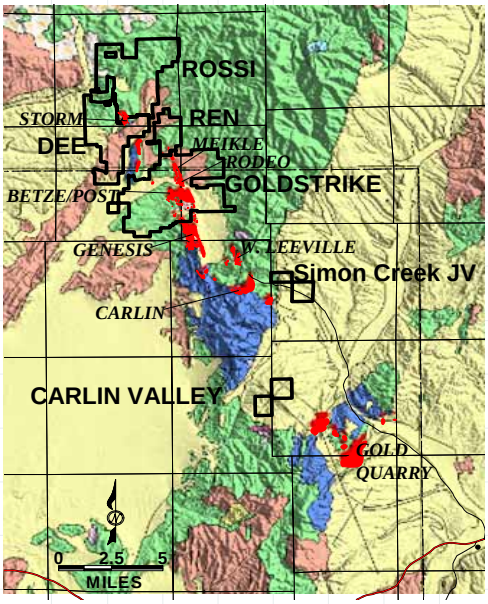

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005


Goldstrike - Property Exploration

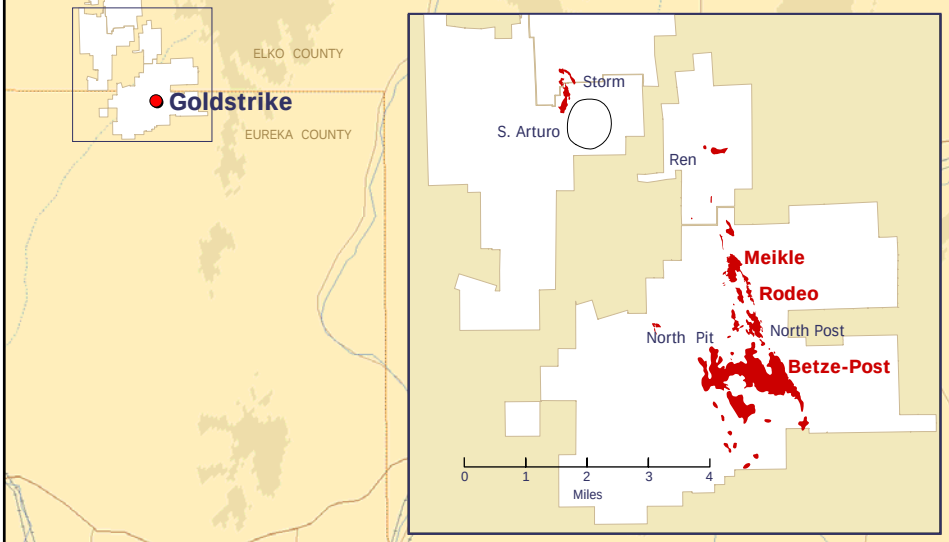



Goldstrike 2005 Exploration Program


- 160,000’ drilling completed YTD
- Program is testing 9 projects in Target Delineation to Reserve Development stages
- Focus on North Post, PFZ North, North Pit and South Pit resource/reserve development
- Positive results at North Pit, PFZ North and North Post


Goldstrike 2005 Target Areas

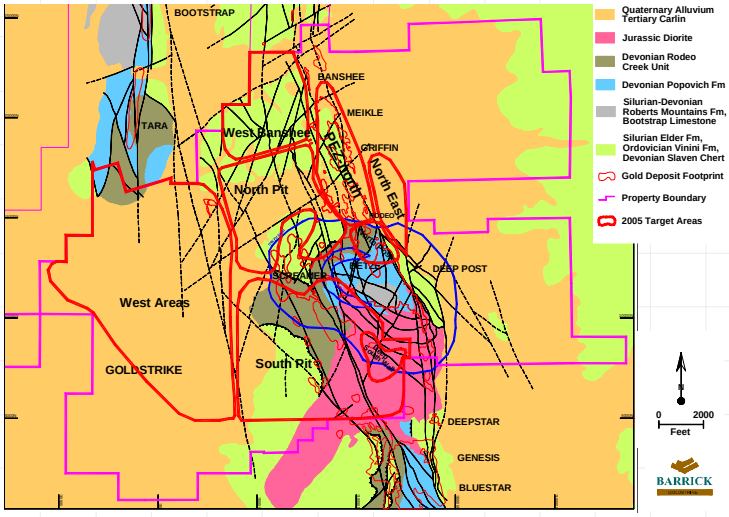

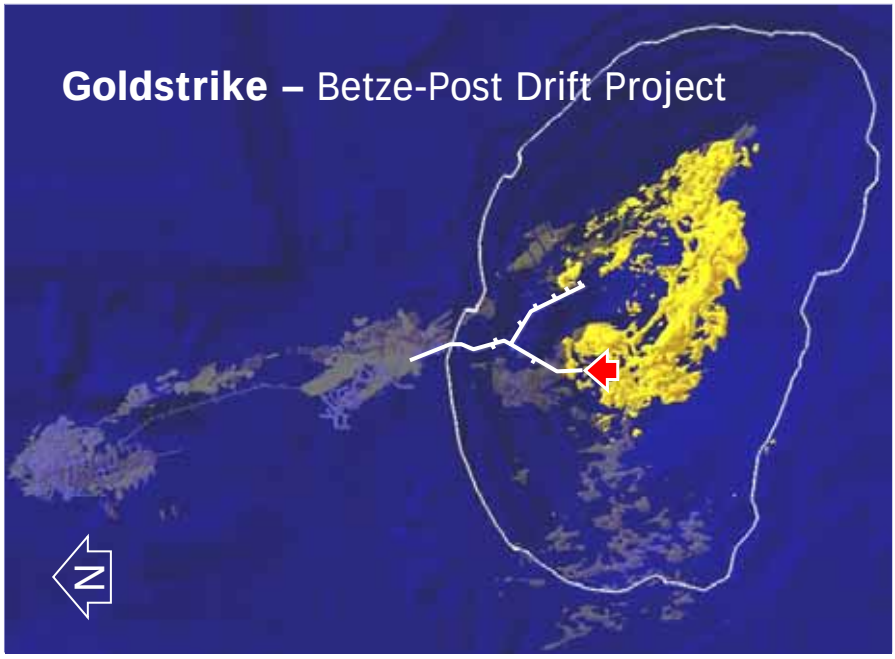
Goldstrike – Betze-Post Drift Project
N

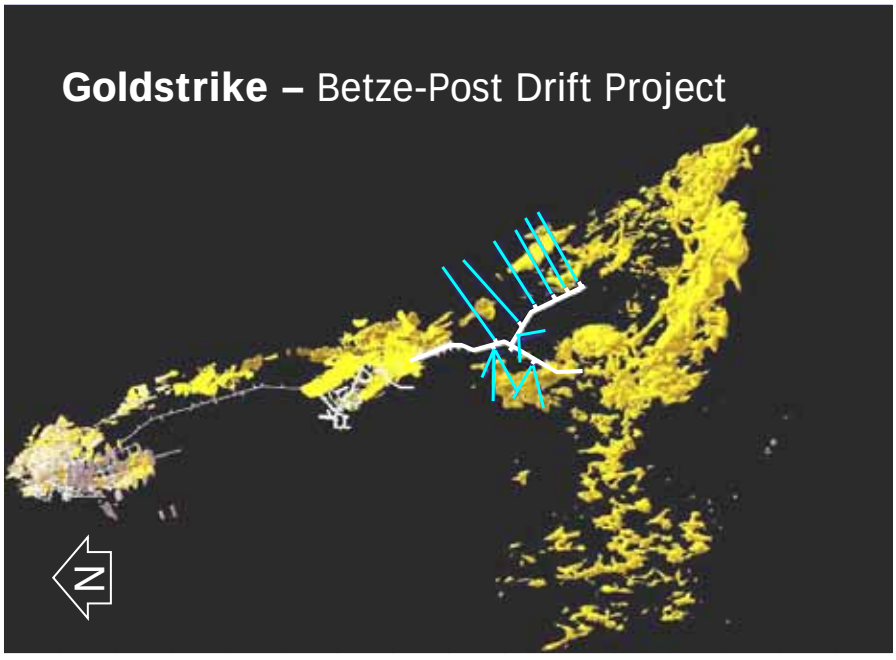
Goldstrike – Betze-Post Drift Project
N

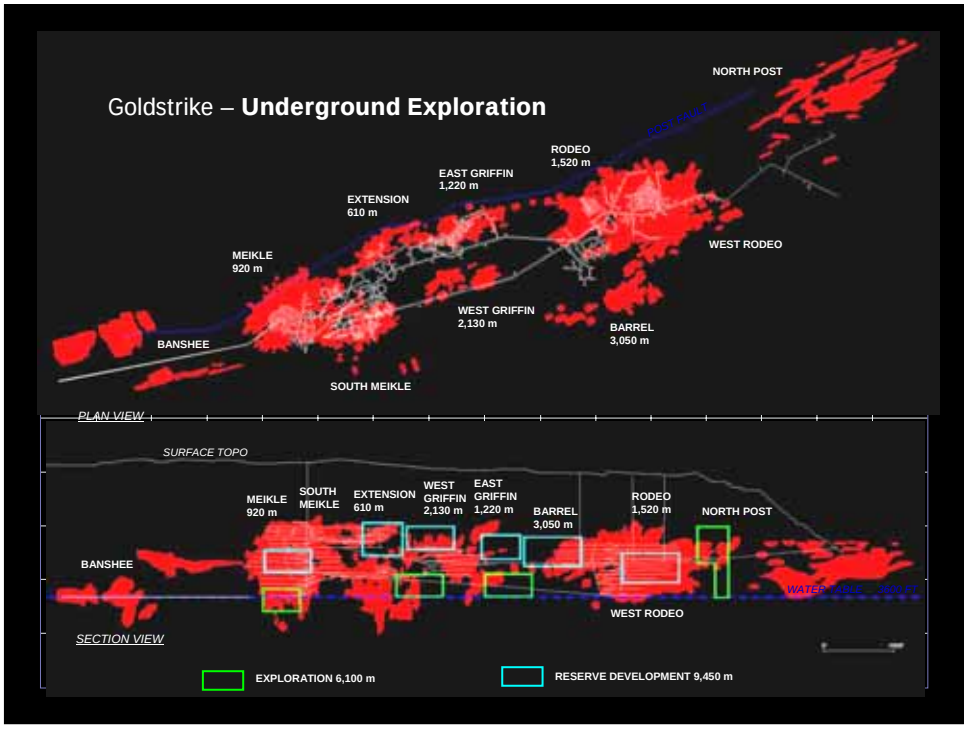

Goldstrike – Underground Exploration
NORTH POST
POST FAULT
RODEO
1,520 m
EAST GRIFFIN
1,220 m
EXTENSION
610 m
MEIKLE
920 m
WEST RODEO
WEST GRIFFIN
2,130 m
BARREL
3,050 m
BANSHEE
SOUTH MEIKLE
PLAN VIEW
SURFACE TOPO
MEIKLE
920 m
SOUTH
MEIKLE
EXTENSION
610 m
WEST
GRIFFIN
2,130 m
EAST
GRIFFIN
1,220 m
BARREL
3,050 m
RODEO
1,520 m
NORTH POST
BANSHEE
WEST RODEO
SECTION VIEW
EXPLORATION 6,100 m
RESERVE DEVELOPMENT 9,450 m

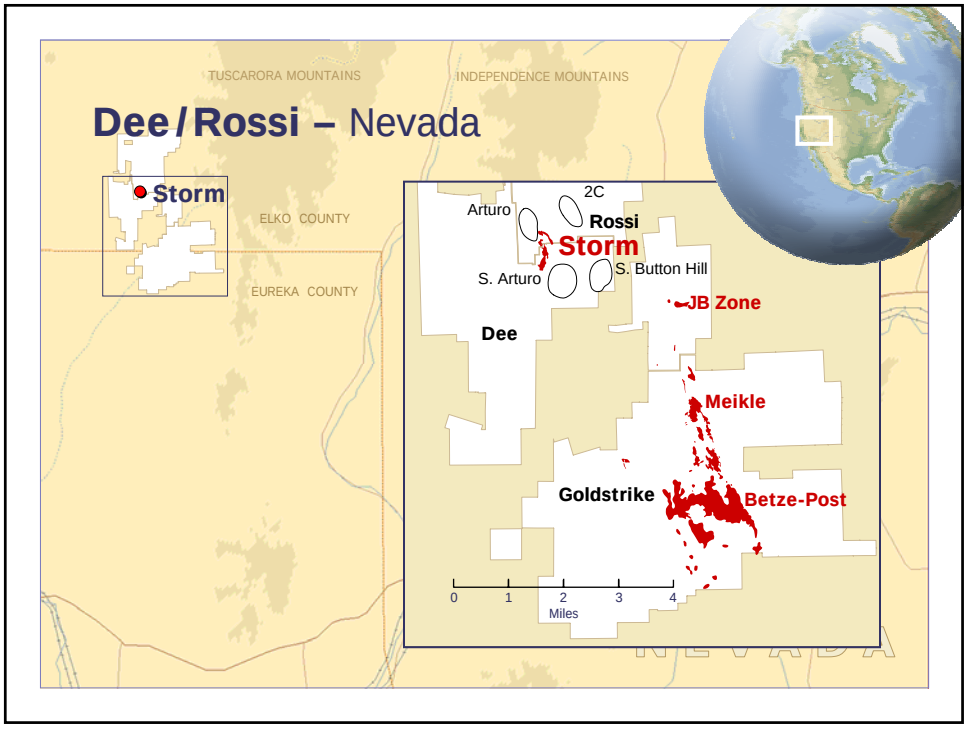
TUSCARORA MOUNTAINS
INDEPENDENCE MOUNTAINS
Dee / Rossi – Nevada
Storm
ELKO COUNTY
EUREKA COUNTY
Arturo
2C
Rossi
Storm
S. Button Hill
S. Arturo
JB Zone
Dee
Meikle
Goldstrike
Betze-Post
0
1
2
3
4
Miles


Dee/Rossi 2005 Program

- 1,250' UG Development, 34,000' UG Core drilling and 32,800' Surface RC Drilling in seven target areas
- 967' UG Development, 23,570' of UG Core drilling in End Zone, Discovery Zone and Dee UG / SW Pit completed YTD
- Positive results encountered at all four UG targets drill tested YTD
- Pre-feasibility study on 49er Zone completed
- Reserve/resource update on Storm at Year End

Rossi – 2005 UG Drill Plan

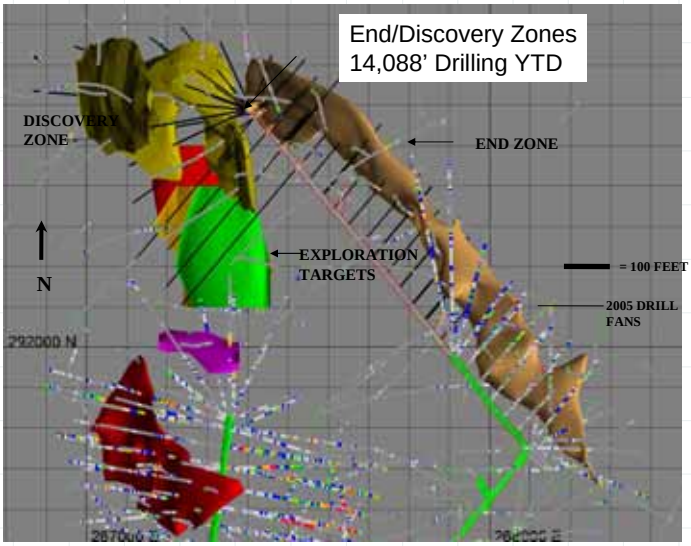



Dee - 2005 UG Drill Plan

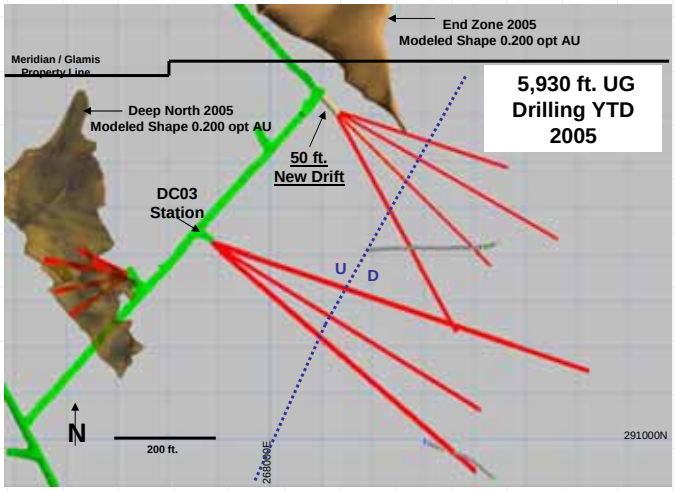

Dee - South Arturo

- Significant results from 2005 program released Oct. 27, 28
- Thick intercepts of significant oxide mineralization encountered in 8 holes
- Area covers 1,000’ by 1,500’
- Drilling to continue through Year End

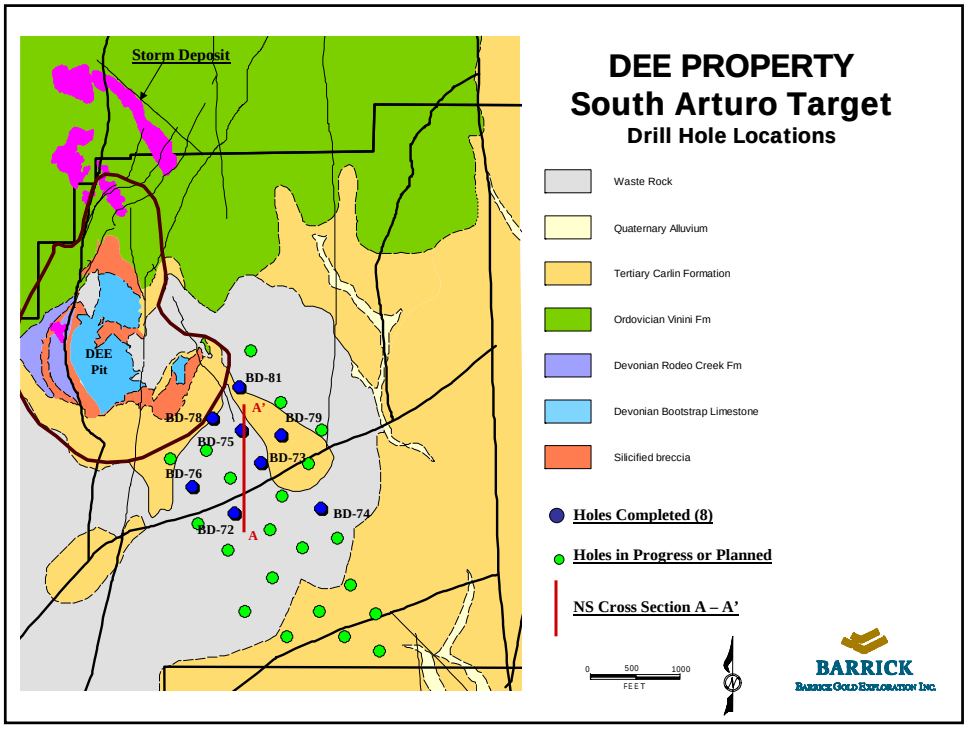

Storm Deposit
DEE Pit
BD-81
A'
BD-78
BD-79
BD-75
BD-73
BD-76
BD-74
BD-72
A
DEE PROPERTY
South Arturo Target
Drill Hole Locations
Waste Rock
Quaternary Alluvium
Tertiary Carlin Formation
Ordovician Vinini Fm
Devonian Rodeo Creek Fm
Devonian Bootstrap Limestone
Silicified breccia
Holes Completed (8)
Holes in Progress or Planned
NS Cross Section A – A'
0 500 1000
FEET
BARRICK
Barrick Gold Exploration Inc.

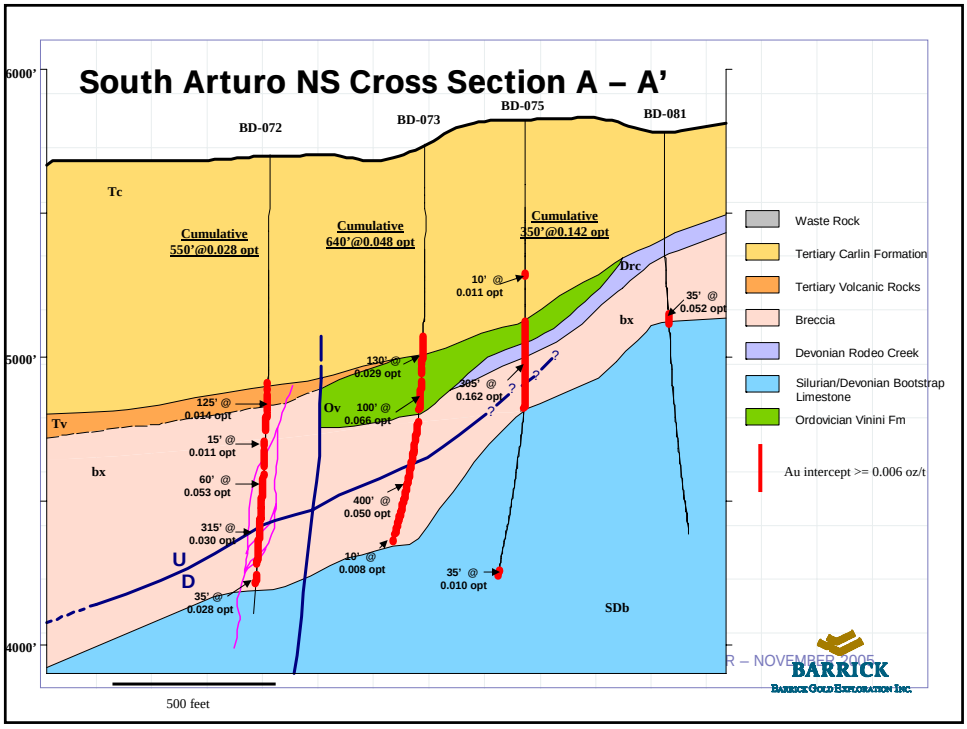

South Arturo NS Cross Section A – A'
6000'
5000'
4000'
BD-072
BD-073
BD-075
BD-081
Tc
Cumulative 550'@0.028 opt
Cumulative 640'@0.048 opt
Cumulative 350'@0.142 opt
Drc
bx
Tv
Ov
SDb
U
D
10' @ 0.011 opt
35' @ 0.052 opt
130' @ 0.029 opt
125' @ 0.014 opt
100' @ 0.066 opt
305' @ 0.162 opt
15' @ 0.011 opt
60' @ 0.053 opt
400' @ 0.050 opt
315' @ 0.030 opt
10' @ 0.008 opt
35' @ 0.010 opt
35' @ 0.028 opt
Waste Rock
Tertiary Carlin Formation
Tertiary Volcanic Rocks
Breccia
Devonian Rodeo Creek
Silurian/Devonian Bootstrap Limestone
Ordovician Vinini Fm
Au intercept >= 0.006 oz/t
500 feet
BARRICK
Barrick Gold Exploration Inc.


Ruby Hill 2005 Program

- 34,500' combined RC and Core drilling planned
- Targets include Deep East Archimedes, East Holly, TL Shaft
- 23,000' drilling completed YTD
- Positive results at Deep East Archimedes and TL Shaft
- Deep Blanchard and RH-426 Zones identified for follow-up on 2006

Ruby Hill – Deep East Archimedes

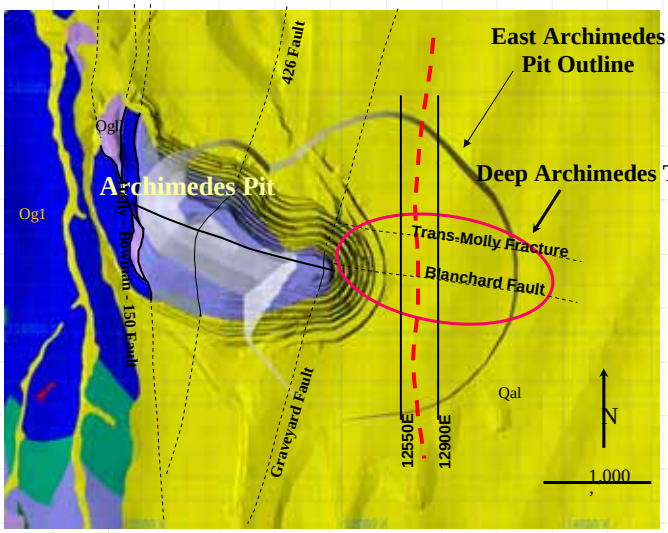

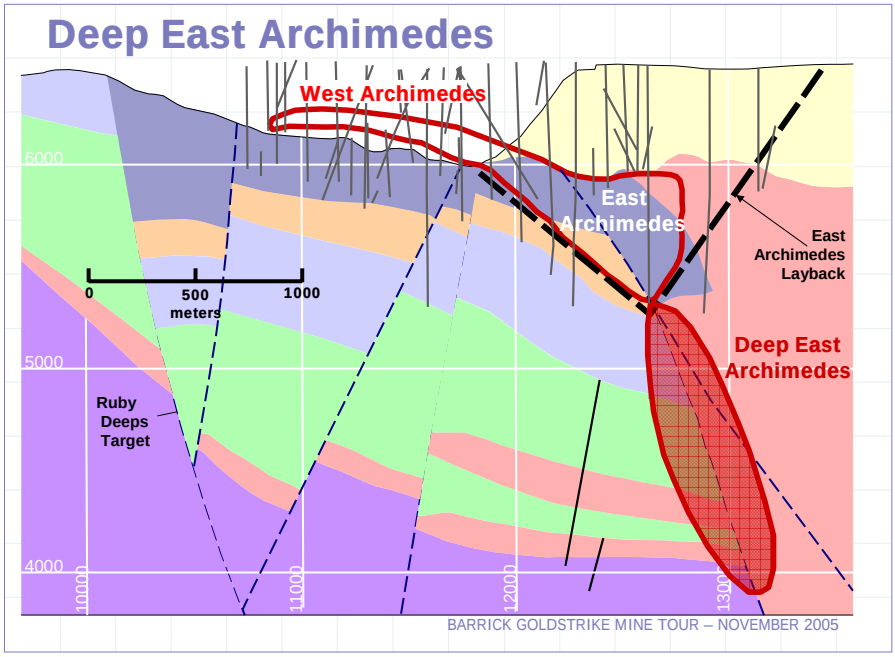
Deep East Archimedes
West Archimedes
East Archimedes
East Archimedes Layback
Deep East Archimedes
Ruby Deeps Target
0
500 meters
1000
6000
5000
4000
10000
11000
12000
13000
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

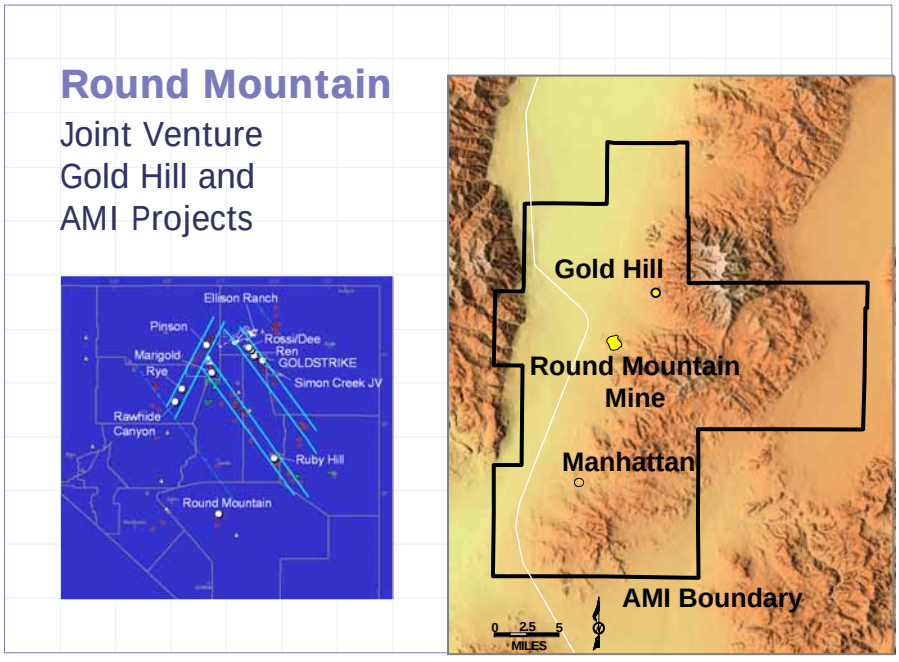
Round Mountain
Joint Venture
Gold Hill and
AMI Projects
Ellison Ranch
Pinson
Rossi/Dee
Ren
GOLDSTRIKE
Marigold
Rye
Simon Creek JV
Rawhide
Canyon
Ruby Hill
Round Mountain
Gold Hill
Round Mountain Mine
Manhattan
AMI Boundary
0 2.5 5
MILES

Round Mountain JV - 2005 Program YTD


West Sinter - Deep Vein Target

- 2 RC/core holes totaling 3,680' completed
- Narrow, low to moderate grade vein intercepts in both holes


AMI Exploration Program

- Targets Identified Include: North Pediment, South Pediment, SE Paleozoic, Palo Alto Hills
- 19 RC holes totaling 19,360' completed YTD
- Follow-up drilling planned at Palo Alto Hills

Marigold JV 2005 Development Drilling

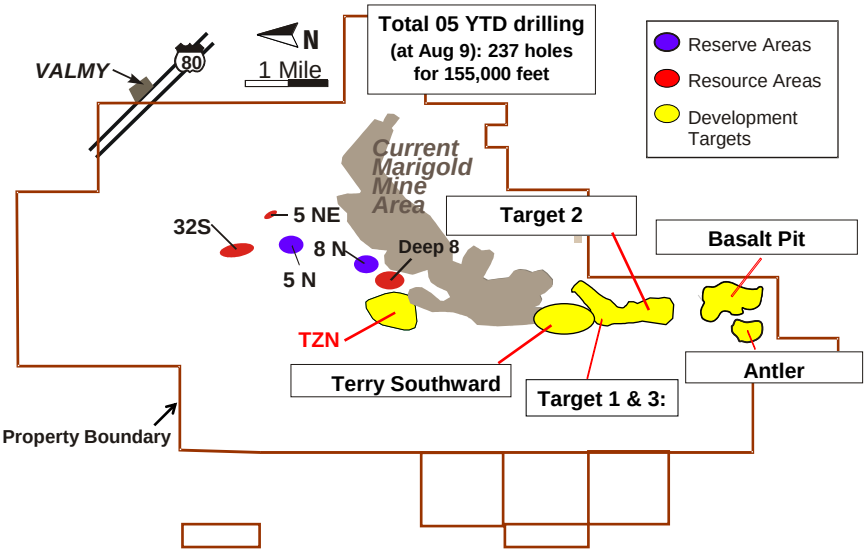

Marigold JV 2005 Exploration Targets

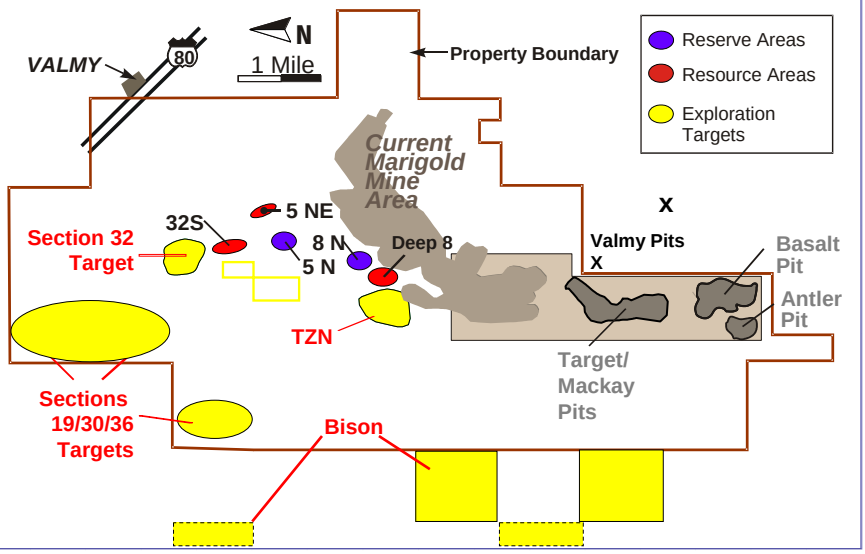

Summary – Nevada Exploration

- 2005 exploration programs are nearing completion throughout Nevada
- Encouraging results have been obtained at the Goldstrike, Dee/Rossi, Ruby Hill projects
- We expect the 2005 program to result in meaningful reserve/resource additions
- Barrick currently has a well balanced pipeline of 35 quality projects ranging from Grassroots exploration to Reserve Development

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005


Welcome to Barrick Goldstrike
930E
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005


Goldstrike Property
Meikle
Roaster
Rodeo
Open Pit
Autoclave
Administration
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005




Goldstrike's History

- Purchased property in 1986 for $62 million
- Oxide heap-leach operation
- Increased property significantly:
  - 600,000 ounces reserves in 1986
  - discovered Meikle in 1989
  - 27.5 million ounces produced through 2004
  - 19.2 million ounces reserves in 2004
- Produced ~2Moz per year 1995 – 2004

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005


Goldstrike's Contribution

2005E Production



Goldstrike
Other N. America
South America
Australia / Africa

2004 Reserves



BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Goldstrike's Decision Making Priorities

Human Safety

Environmental Protection


Property Protection

Production

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Goldstrike's Safety Performance

MSHA Reportable Injuries – 2001-2005

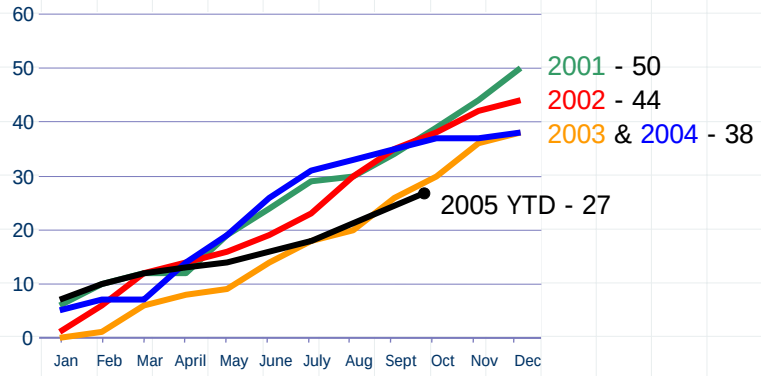

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Goldstrike's Environmental Stewardship

- Concurrent reclamation of waste dumps
- AA heap leach reclamation
- State-of-the-art environmental controls in processing and mining

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Goldstrike's Community Contribution

- Employ 1,600 highly trained and skilled mining professionals
- $70 million to communities, schools and charities since 1986

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Goldstrike's Production - 2005 estimates

- Total production: 2,000,000 – 2,020,000 ounces
- Total cash cost: $255 – $260 per ounce[1]

Open Pit contribution

- Production: 1,470,000 – 1,480,000 ounces
- Total cash cost: $240 – $250 per ounce[1]

Underground contribution

- Production: 530,000 – 540,000 ounces
- Total cash cost: $300 – $310 per ounce[1]

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

1 Reflects the impact of the new accounting policy for stripping costs and the inclusion of accretion expense.


The Outlook for Goldstrike

The Next Chapter


- Cost containment
- Enhancement initiatives
- Leverage existing infrastructure
- Reserve additions

Peer Group – Cash Cost Increases

(Compound Annual Increase - 2002-2005E)

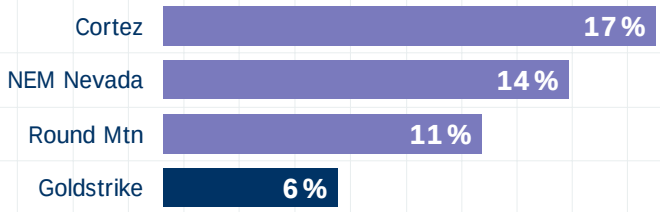


Open-Pit Operations
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

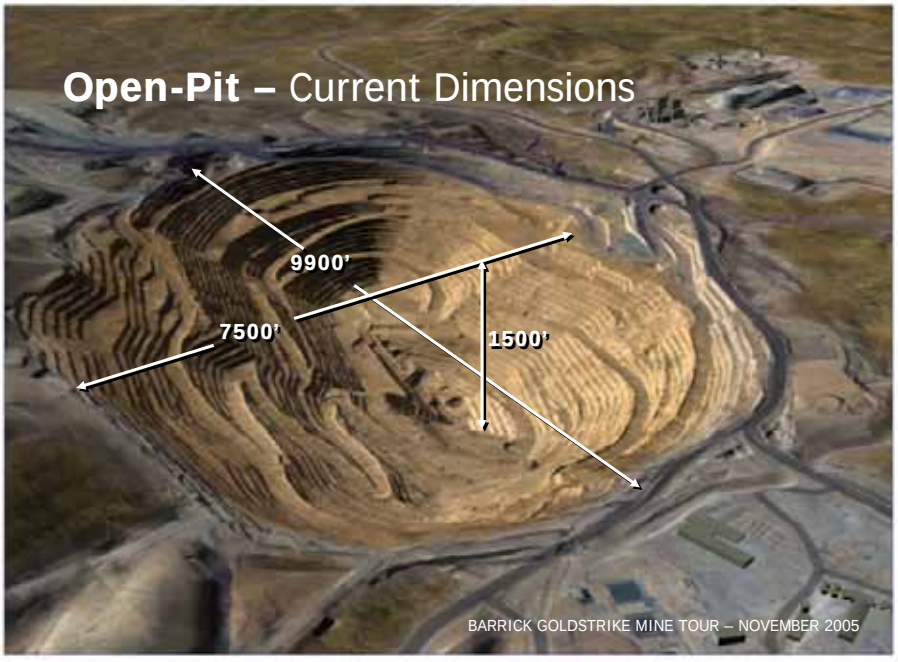
Open-Pit – Current Dimensions
9900'
7500'
1500'
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Open Pit Operations

- Conventional large truck / shovel operation
- Operated 24 hours per day
- Approximately 600 people

Open Pit Operations – Major Equipment

- Loading Fleet
  - 4 P&H 2800's
  - 1 Hitachi 5500
  - 1 Le Tourneau L1850
- Trucks
  - 31 Komatsu 930 haul trucks
- Drills
  - 8 Ingersoll Rand Drills

Open-Pit – Mining Rates

(000's)	2001	2002	2003	2004	2005E
Tons mined	154,233	142,898	141,693	134,212	132,445
Tons per day	433	401	398	376	370
Tons of ore	17,412	14,552	9,589	9,434	9,253
Grade mined (oz/ton)	0.15	0.14	0.20	0.16	0.18
Reserve grade (oz/ton)	0.15	0.15	0.15	0.14	0.13
Tons waste	136,821	128,346	132,104	124,778	123,192

Open-Pit – Reducing Costs / Improving Productivity

- Increasing employee involvement
- Operating practices
- Increasing revenue
- Technology
- Controlling major costs

Open-Pit – Haul Truck Tire Life

Since Oct 2002, focus on improving tire life through awareness, improved technology, and behaviors has led to 50+% increase in life of $22K truck tires.







Open-Pit – TEAM Approach to Equipment Reliability

Since Aug 2003, building sense of ownership (through involvement, awareness, and team-based problem solving) and focusing on the basics have led to reliability improvements in the haul truck fleet (Phase 1 of TEAM).










Open-Pit – Weird II

In 2005, performed a 2-month underground mining project from the pit where 20,508 tons were mined, producing 10,647 ounces of gold profitably.




Open-Pit – Unit Mining Costs

Tons Mined Per Manshift (thousands)

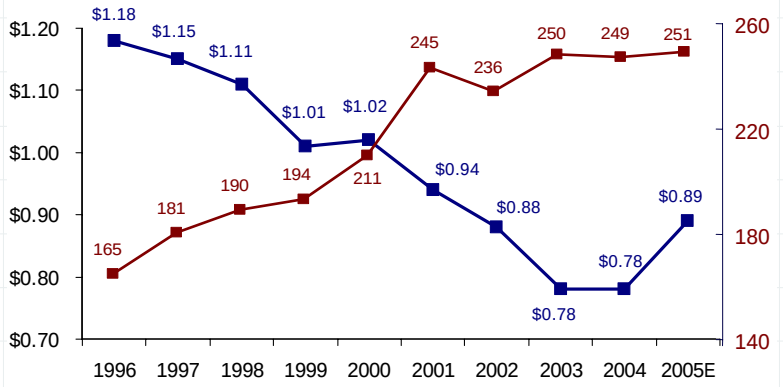

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005


Underground Operations
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

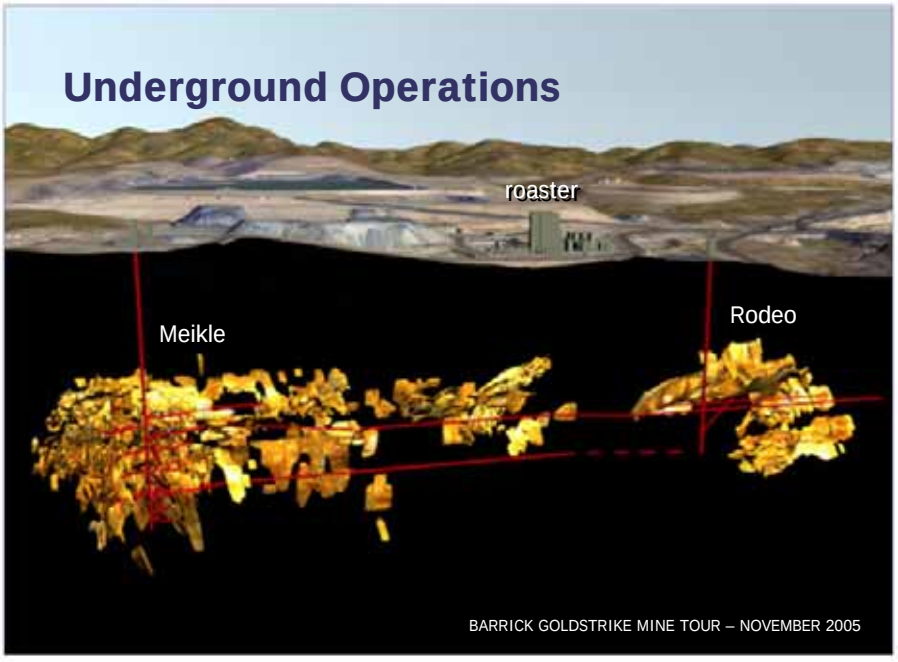
Underground Operations
roaster
Meikle
Rodeo
BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Underground Operations

- Accessed by shaft
- Operated 24 hours per day
- Approximately 500 people
- Mining Methods
  - drift and fill
  - long hole open stope

Underground – Mining Rates

(000's)	2001	2002	2003	2004	2005E
Tons hoisted	1,372,431	1,634,875	1,630,648	1,573,321	1,478,168
Tons per day	3,770	4,504	4,523	4,305	4,089
Grade mined (oz/ton)	0.561	0.427	0.383	0.401	0.388
Reserve grade (oz/ton)	0.457	0.439	0.398	0.377	0.392

Underground – Reducing Costs / Improving Productivity

- Increase employee involvement
- Improve approach to maintenance
- Alternative mining methods
- Operational Improvements

Underground – 5S Initiative


Our 5S initiative has organized our maintenance shops into a more safe and efficient workplace.

1. Sort
2. Set in order
3. Shine
4. Standardize
5. Sustain






Underground – Unit Mining Costs (per ton)

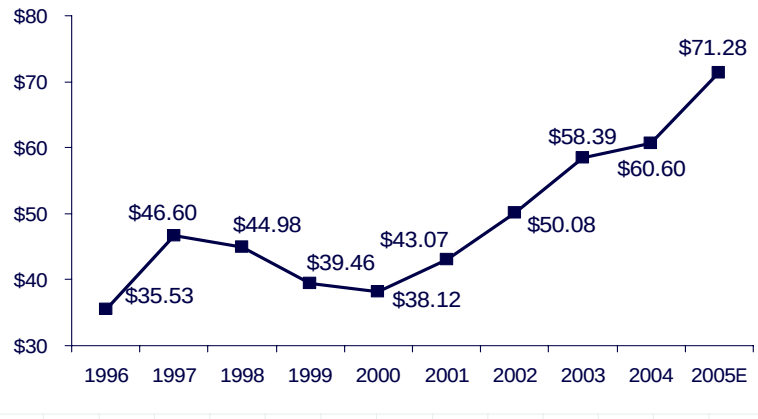

Does not include dewatering costs

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

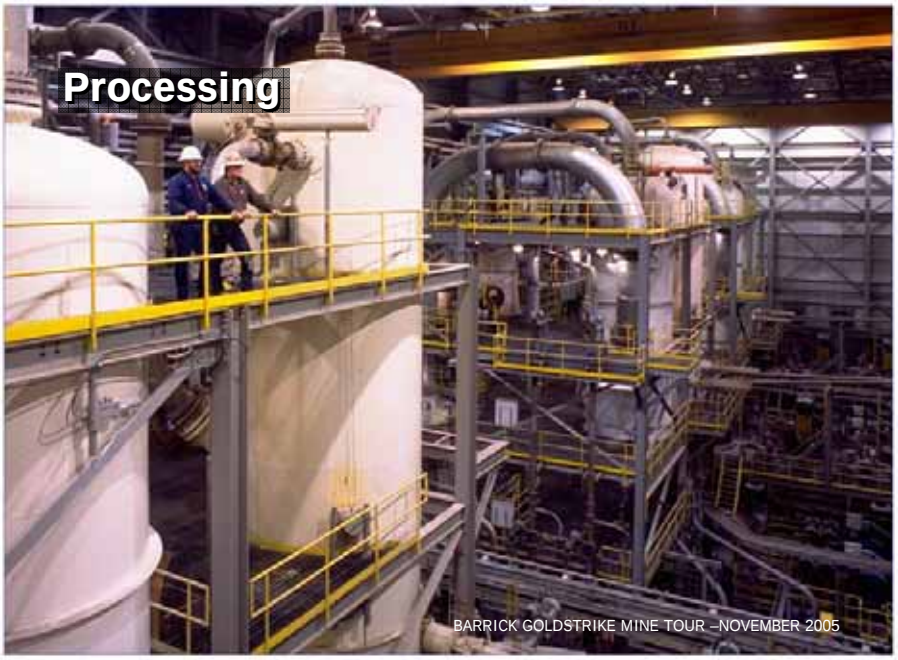

Processing

- Two processing facilities
  - Autoclave
  - Roaster
- Operated 24 hours per day
- Approximately 430 people

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Processing

There are two types of gold ore:


Single refractory - the gold is locked in sulfide mineral particles that must be oxidized to expose the gold for cyanide leaching. The autoclaves do this function effectively.

Double refractory - the ore also contains *preg-robbing* carbon that will collect solubilized gold in the leaching circuit if it is not removed (oxidized) first. Both of these problems are solved by roasting the ore at a high temperature.

Processing – 2005 Estimated Throughput

Tons per Day	Autoclave	Roaster	Total
Open Pit	17,952	9,943	27,895
Custom Ore	169	2,190	2,359
Underground	0	4,142	4,142
Total	18,121	16,275	34,396

Processing – Throughput Rates

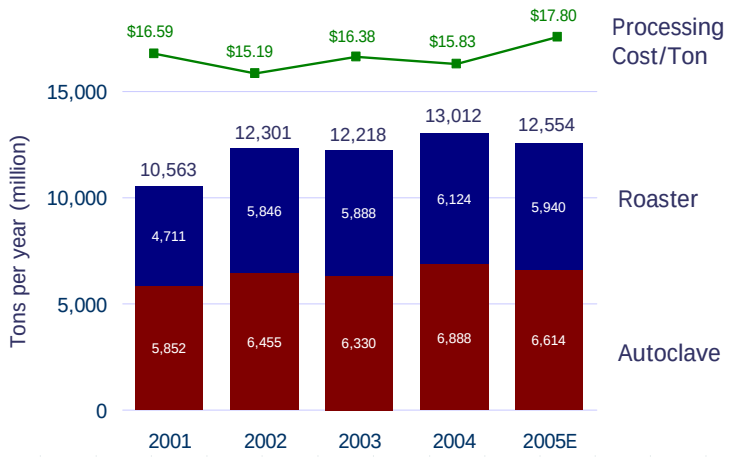


Processing – Reducing Costs / Improving Productivity

- Employee involvement in CI initiatives and safety programs
- Optimize reagent consumption

Processing – Reagent Optimization


Propane Consumption – gallons per ton

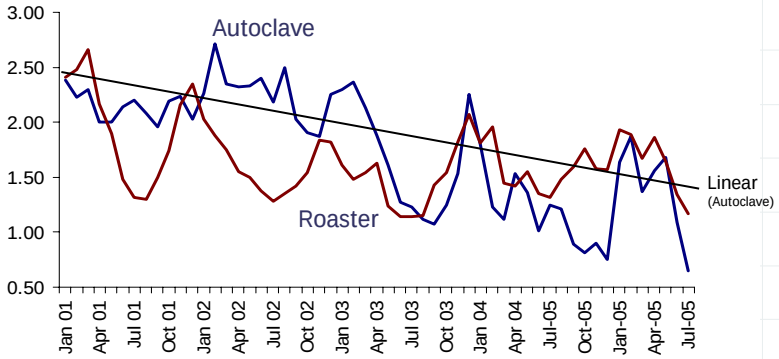

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Processing – Reagent Optimization – Grinding Media

Autoclave Grinding Ball Consumption – pounds per ton

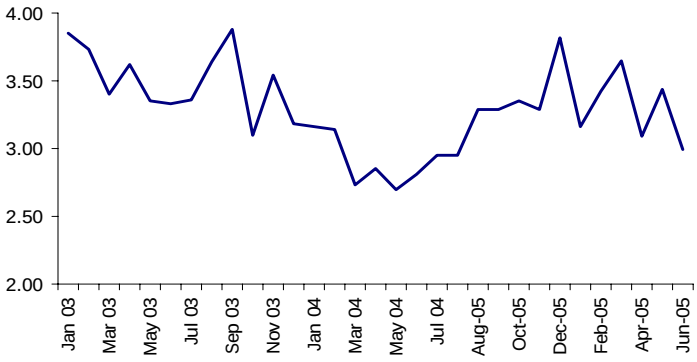

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

Summary – Goldstrike

- Reliable mine generating strong earnings and cash flow
- Management team focused on maximizing the value of assets
- Excellent potential to expand reserves particularly in a strong gold price environment

BARRICK GOLDSTRIKE MINE TOUR – NOVEMBER 2005

